

GP2Z0002AU

Optical Pointing Device

Easy Operation and High Reliability Thanks to Non-contact Optical System

General Description

Sharp's **GP2Z0002AU** is a compact and thin type optical pointing device, eliminating the complicated operation, mechanical wear thanks to newly developed non-contact system. It is suitable for I/O devices in the notebook type PCs and personal information tools.

Features


- (1) Easy operation thanks to adoption of optical system and slide system
- (2) High reliability due to elimination of the contact wear with the optical system
- (3) Compact and thin type
 - * The microcomputer for control is also available as custom-ordered.
 - (It is available as a kit with the pointing device.)

Applications

- (1) Notebook type PCs
- (2) Personal information tools

Outline Dimensions

(Unit: mm)

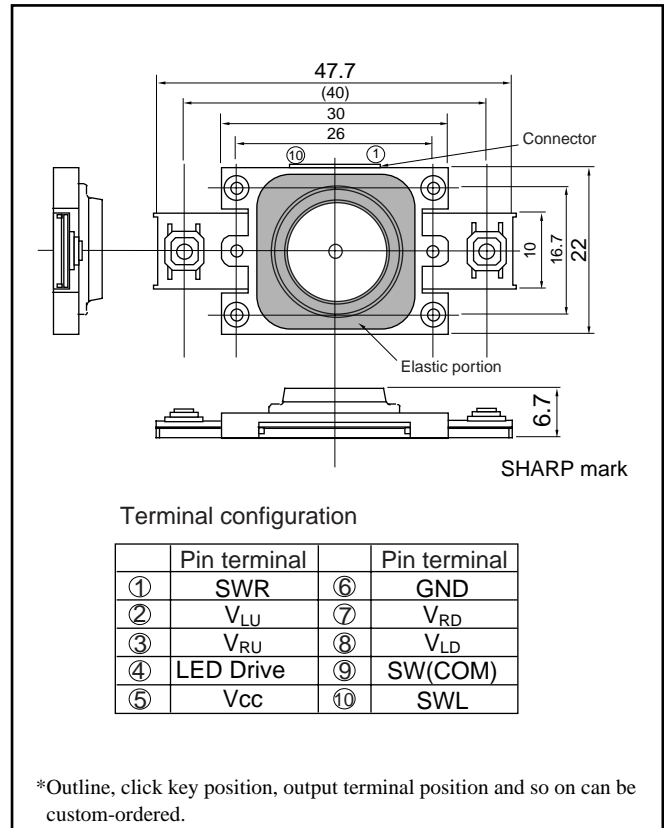

Absolute Maximum Ratings

Parameter	Symbol	Rating	Unit	Conditions
Supply voltage	V _{CC}	-0.3 to 7.0	V	T _a =25°C
Output voltage	V _{OUT}	-0.3 to V _{CC} +0.3	V	T _a =25°C
Operating temperature	T _{opr}	0 to +60	°C	-
Storage temperature	T _{stg}	-10 to 70	°C	-

(Notice) • In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that may occur in equipment using any SHARP devices shown in catalogs, data books, etc. Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device.
 • Specifications are subject to change without notice for improvement.

(Internet) • Data for Sharp's optoelectronic/power devices is provided on internet. (Address <http://www.sharp.co.jp/ecg/>)

GP2Z0002AU

Optical Pointing Device

Specifications

(Ta=25°C)

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Supply voltage	V _{CC}	Ta=0 to 60°C	3.7	4.0	4.3	V
Output voltage	V _{LU} , V _{LD} , V _{RU} , V _{RD}	V _{CC} =4.0V, R _L =47Ω *2	0.7	1.35	2.0	V
*1 Increase rate of subtraction output	A/B	V _{CC} =4.0V, R _L =47Ω *2 (X,Y)=(0.3, 0), (0, 0.3) [mm]	0.15	0.3	0.45	-
*1 Increase rate of subtraction output	A/B	V _{CC} =4.0V, R _L =47Ω (X,Y)=(-0.3, 0), (0, -0.3) [mm]	-0.15	-0.3	-0.45	-
Dissipation current	I _{CC}	V _{CC} =4V, R _L =47Ω *2 *3	-	38	46	mA

*1 Subtraction output A

X-axis movement : $A_x = (V_{LU} + V_{LD}) - (V_{RU} + V_{RD})$

Y-axis movement : $A_y = (V_{LU} + V_{RD}) - (V_{RU} + V_{LU})$


The addition output B for both X and Y axis : $B = 4 \times V_{ref} - (V_{LU} + V_{LD} + V_{RU} + V_{RD})$

V_{ref} is V_{LU}, V_{LD}, V_{RU} and V_{RD} in the LED-OFF mode.

*2 R_L=47Ω is the external resistor.

*3 Dissipation current including LED current

Internal Block Diagram

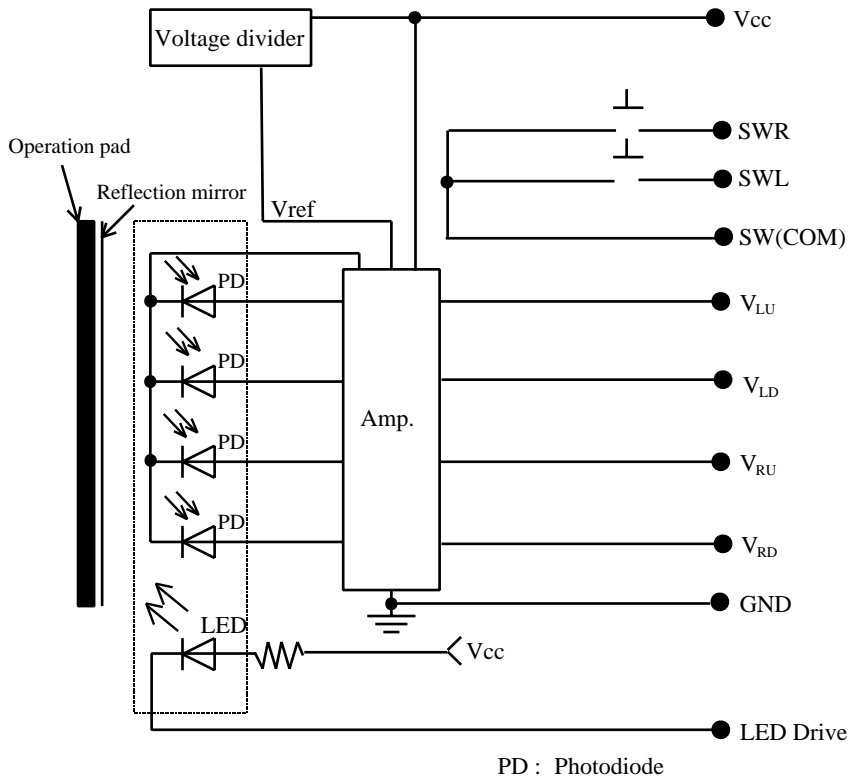

NOTICE

- The circuit application examples in this publication are provided to explain representative applications of SHARP devices and are not intended to guarantee any circuit design or license any intellectual property rights. SHARP takes no responsibility for any problems related to any intellectual property right of a third party resulting from the use of SHARP's devices.
- Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device. SHARP reserves the right to make changes in the specifications, characteristics, data, materials, structure, and other contents described herein at any time without notice in order to improve design or reliability. Manufacturing locations are also subject to change without notice.
- Observe the following points when using any devices in this publication. SHARP takes no responsibility for damage caused by improper use of the devices which does not meet the conditions and absolute maximum ratings to be used specified in the relevant specification sheet nor meet the following conditions:
 - (i) The devices in this publication are designed for use in general electronic equipment designs such as:
 - Personal computers
 - Office automation equipment
 - Telecommunication equipment [terminal]
 - Test and measurement equipment
 - Industrial control
 - Audio visual equipment
 - Consumer electronics
 - (ii) Measures such as fail-safe function and redundant design should be taken to ensure reliability and safety when SHARP devices are used for or in connection with equipment that requires higher reliability such as:
 - Transportation control and safety equipment (i.e., aircraft, trains, automobiles, etc.)
 - Traffic signals
 - Gas leakage sensor breakers
 - Alarm equipment
 - Various safety devices, etc.
 - (iii) SHARP devices shall not be used for or in connection with equipment that requires an extremely high level of reliability and safety such as:
 - Space applications
 - Telecommunication equipment [trunk lines]
 - Nuclear power control equipment
 - Medical and other life support equipment (e.g., scuba).
- Contact a SHARP representative in advance when intending to use SHARP devices for any "specific" applications other than those recommended by SHARP or when it is unclear which category mentioned above controls the intended use.
- If the SHARP devices listed in this publication fall within the scope of strategic products described in the Foreign Exchange and Foreign Trade Control Law of Japan, it is necessary to obtain approval to export such SHARP devices.
- This publication is the proprietary product of SHARP and is copyrighted, with all rights reserved. Under the copyright laws, no part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, in whole or in part, without the express written permission of SHARP. Express written permission is also required before any use of this publication may be made by a third party.
- Contact and consult with a SHARP representative if there are any questions about the contents of this publication.